




# PENKO Engineering BV

The Leading Experts In Weighing & Dosing

## 7.5kg-200kg **PC1**

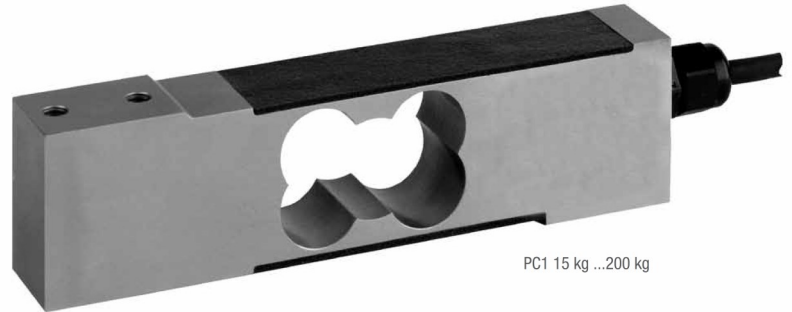

PC1 15 kg ...200 kg



PC1 7.5 kg and 10 kg



### Product Description

The type PC1 is a stainless steel single point load cell with an improved potting. It is suitable for use in industrial environments.

### Application

- Bench and floor scales, conveyor scales

### Key Features

- Wide range of capacities from 7.5 kg to 200 kg
- Stainless steel construction
- Environmental Protection IP67 (IP65 for 7.5 kg and 10 kg)
- Maximum platform size up to 600 x 600 mm
- Integral mounting spacer

### Approvals

- OIML approval to C3, C3 MI6 and C4 (Y = 10 000)
- NTEP approval to 4 500 intervals, Class III (for 7.5 kg to 75 kg)
- ATEX hazardous area approval for Zone 0, 1, 2, 20, 21 and 22
- FM hazardous area approval

### Options

- Y = 15 000 for C3, C3 MI6 and C4
- M10 mounting threads available (only for 50 kg, 75 kg and 100 kg)

### Packed Weight


Capacity (kg)	7.5-100	200
Weight (kg)	1.2	1.6

### Available Accessories

- Compatible range of electronics

### Wiring

- The load cell is provided with a shielded, 4 conductor cable (AWG 24). Cable jacket polyurethane
- Cable length: 3 m
- Cable diameter: 5 mm
- The shield is connected to the load cell body

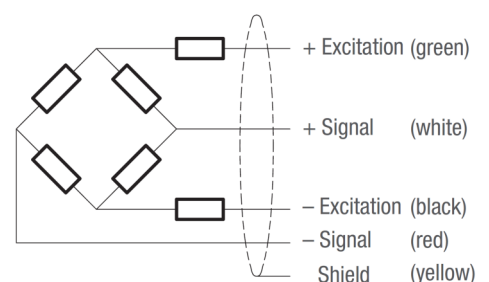

## Specifications


Maximum capacity		(E <sub>max</sub> )	kg	7.5 / 10 / 15 / 30 / 50 / 75 / 100 / 200		
Accuracy class according to OIML R60			(GP)	C3	C3 MI 6	C4
Maximum number of verification intervals		(n <sub>LC</sub> )	n.a.	3 000		4 000
Minimum load cell verification interval			n.a.	E <sub>max</sub> / 10 000		
Temperature effect on minimum dead load output		(TC <sub>0</sub> )	%*RO/10°C	± 0.0400	± 0.0140	
Temperature effect on sensitivity		(TC <sub>RO</sub> )	%*RO/10°C	± 0.0200	± 0.0100	± 0.0080
Combined error			%*RO	± 0.0500	± 0.0200	± 0.0180
Non-linearity			%*RO	± 0.0400	± 0.0166	± 0.0166
Hysteresis			%*RO	± 0.0400	± 0.0166	± 0.0083
Creep error (30 minutes) / DR			%*RO	± 0.0600	± 0.0166	± 0.0083
Option	Min. load cell verification interval	(v <sub>min opt</sub> )		n.a.	E <sub>max</sub> / 15 000	
	Temp. effect on min. dead load output	(TC <sub>0 opt</sub> )	%*RO/10°C	n.a.	± 0.0093	
Rated Output		(RO)	mV/V	2 ± 0.1		
Zero balance			%*RO	± 5		
Excitation voltage			V	5...15		
Input resistance		(R <sub>LC</sub> )	Ω	390 ± 20		
Output resistance		(R <sub>out</sub> )	Ω	330 ± 25		
Insulation resistance (100 V DC)			MΩ	≥ 5 000		
Safe load limit		(E <sub>lim</sub> )	%*E <sub>max</sub>	200		
Ultimate load			%*E <sub>max</sub>	300		
Safe side load			%*E <sub>max</sub>	100		
Maximum platform size; loading according to OIML R76		mm		350x350 for 7.5...15 kg / 450x450 for 30...75 kg / 600x600 for 100...200 kg		
Maximum off center distance at maximum capacity		mm		115 for 7.5...15 kg / 150 for 30...75 kg / 200 for 100...200 kg		
Compensated temperature range		°C		-10...+40		
Operating temperature range		°C		-20...+65 (ATEX -20...+60)		
Load cell material				stainless steel 17-4 PH (1.4548)		
Sealing				plastic covered		
Protection according EN 60 529				IP67*		

The limits for Non-Linearity, Hysteresis, and TC<sub>RO</sub> are typical values.

The sum of Non-linearity, Hysteresis and TC<sub>RO</sub> meets the requirements according to OIML R60 with p<sub>LC</sub>=0.7.

\* Attention: IP65 for 7.5 kg and 10 kg

## Dimensions (in mm)

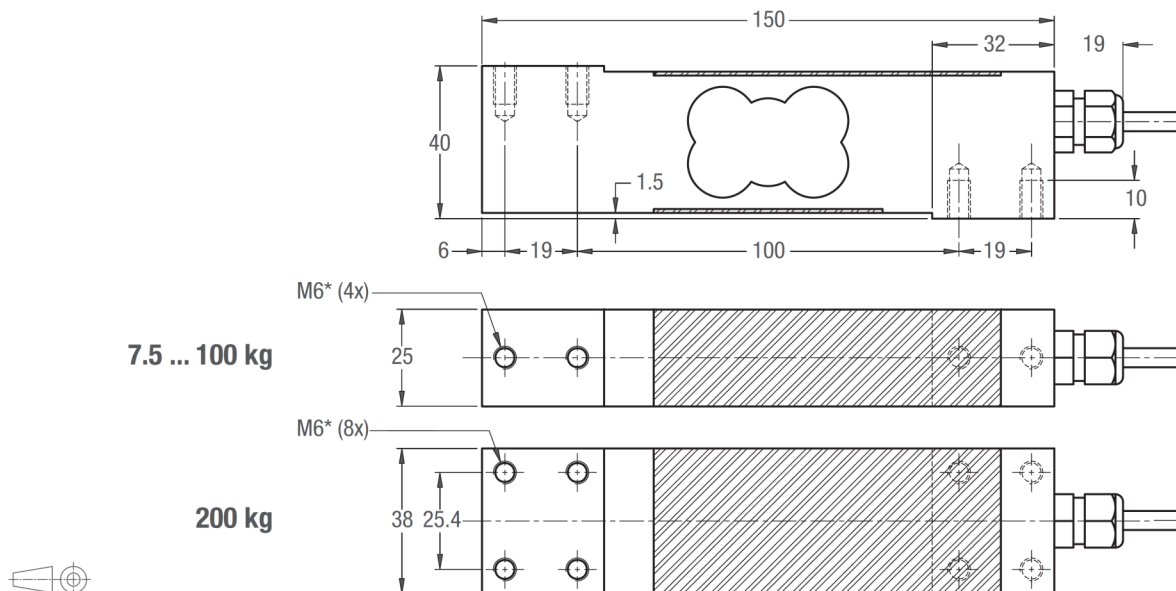

PC1: Mounting bolts M6 8.8; torque 10 Nm. Torque value assumes oiled threads.

\* Unified thread 1/4-20 UNC is available.

PC1B: Mounting bolts M10 8.8; torque 50 Nm (50/75/100 kg). Torque value assumes oiled threads.

If countersunk mounting screws are used, ask for detailed drawing.

